


Mactech Europe

AX024 FLANGE FACER



A portable flange facing and grooving machine designed for machining full faced, raised face and grooved flanges up to 23³/₄" (603mm) in diameter.

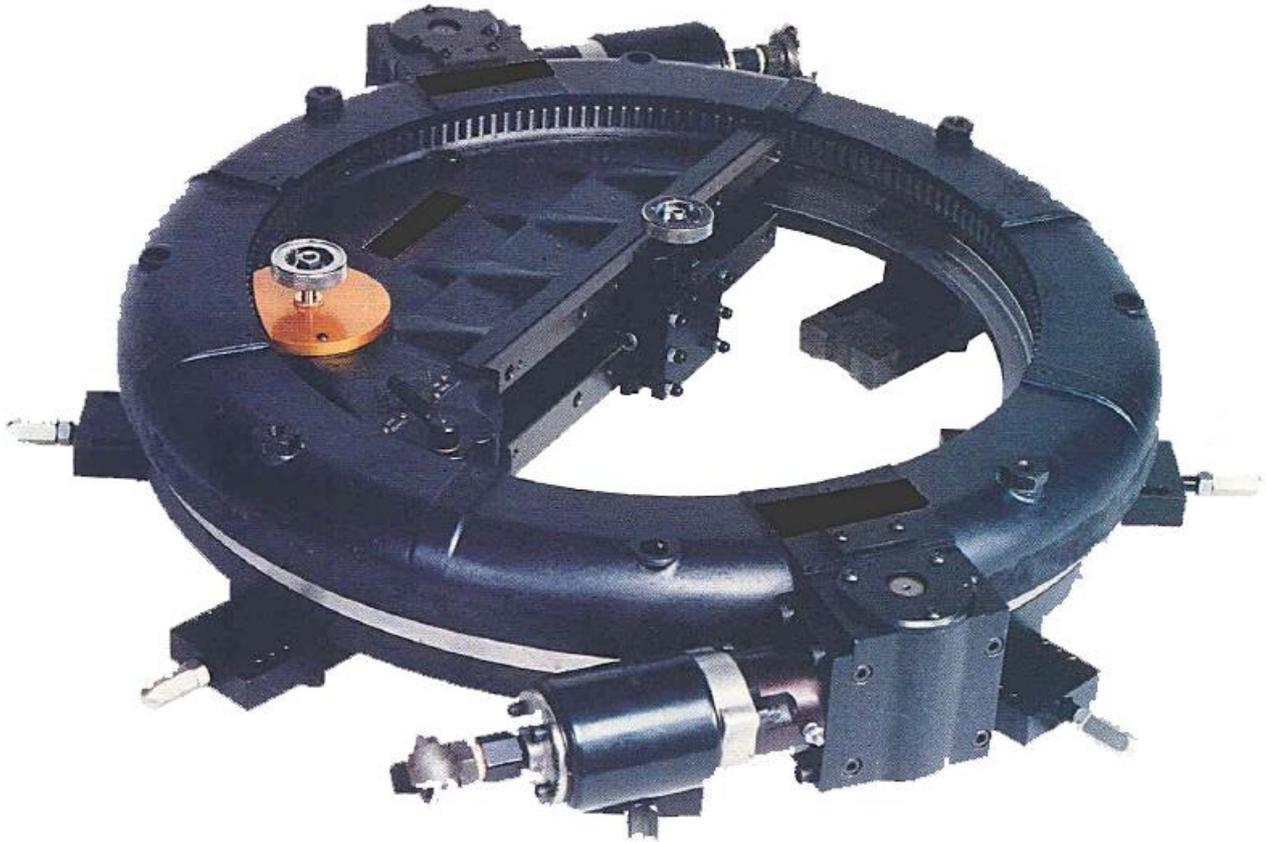

Features

- Compact
- Portable
- Externally mounted
- Operates in any position
- Cuts 'O' ring grooves, vertical grooves, 'V' Grooves, lens ring facings and weld preparations
- Achieves surface finishes from 250 CLA to 63 CLA when polishing
- Pneumatic drive permits use in hazardous areas
- Provided in own transportable case



Mactech
(EUROPE) LIMITED

UK HEAD OFFICE
EATON BANK TRADING ESTATE
RIVERDANE ROAD
CONGLETON
CHESHIRE
CW12 1PN



Mactech
(EUROPE) LIMITED

www.mactechurope.co.uk - info@mactechurope.co.uk

DECOMMISSIONING / IN-SITU MACHINING SERVICES / MACHINE SALE & RENTAL

+ 44 (0) 1260 253846

ABERDEEN OFFICE
MACTECH HOUSE
HOWE MOSS DRIVE
DYCE
ABERDEEN
AB21 0GL


+ 44 (0) 1224 722666

Mactech Europe

AX024 FLANGE FACER



Mactech Europe AX024 flange facing and grooving machine is constructed from the highest quality materials. It is designed to give machine shop accuracy combined with portability and ease of handling for work on flanges of 0"-23" diameter.

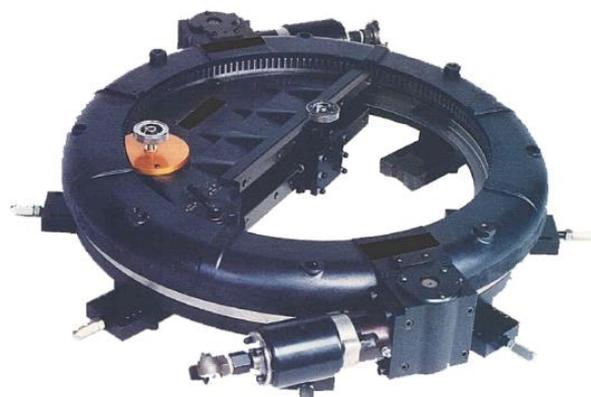

Base Ring Assembly

Eight separate adjustable clamp blocks are provided. These can be positioned on the base ring to suit the size of flange being machined. The arrangement enables the machine to be locked in position and centred relative to the flange using adjustable screws on the clamp blocks.

Drive Ring

The drive ring module, incorporating the bearing assembly, provides the drive for the saddle via a worm, worm wheel and internal gear arrangement. Power driving the machine is provided by two 1.55 hp pneumatic power units mounted on the drive ring.

Saddle

The saddle is mounted on the drive ring and bearing assembly and provides a rigid structure to which the toolpost is fixed. With drive provided through the drive ring internal gear arrangement and saddle pick-up gear, the saddle and support bearings rotate around the internal gear in a planetary motion.

Toolpost traverse in and out is provided by a lead screw driven by the saddle gear train. Traverse is selected by a traverse selector.

The machine can achieve cuts to a maximum of 0.39" (1mm) without flanged holes and 0.020" (0.5mm) with flanged holes.

Alternative tool posts can be fitted to the saddle depending on the machine application.

Table of Surfacing Feeds

Selector position	Feed (inches)	Feed (mm)
In	0.032	0.81
Out	0.008	0.20
Hand held	0.002	0.5

Specifications

Principal dimensions

Overall diameter (inc. motors)	40" (1016mm)
Height	7" (179mm)
Rotational diameter	23" (584mm)
Toolpost traverse (min/max)	0"-16" (0-406mm)
Toolpost vertical travel	1½" (38mm)

Weights

Nett weight (less case)	387lbs (176kg)
Total shipping weight	495lbs (225kg)

Case dimensions

Length	38½" (980mm)
Height	18½" (470mm)
Width	31½" (800mm)

General information

Flange range dia. (with crank tool)	0-23¾" (0-603mm)
Gripping range (min/max)	12-23" (305-584mm)
Drive motors	Two 1.55 hp each
Minimum air supply requirement	90 psi @96 cfm
Final rotational speed	46rpm



Mactech
(EUROPE) LIMITED

UK HEAD OFFICE
EATON BANK TRADING ESTATE
RIVERDANE ROAD
CONGLETON
CHESHIRE
CW12 1PN



Mactech
(EUROPE) LIMITED

www.mactech europe.co.uk - info@mactech europe.co.uk

DECOMMISSIONING / IN-SITU MACHINING SERVICES / MACHINE SALE & RENTAL

+ 44 (0) 1260 253846

ABERDEEN OFFICE
MACTECH HOUSE
HOWE MOSS DRIVE
DYCE
ABERDEEN
AB21 0GL

+ 44 (0) 1224 722666