

848 WD Clamshell Lathe

36 to 48 inches (914.4 to 1219mm) Nominal Bore

Mactech Europe offer portable pipe cutting machines for On-Site precision cutting and bevelling of most pipe sizes, schedules and materials.

The Clamshell Lathes cover a wide range of pipe sizes from 2" to 110" Nominal Bore and are designed so that minimal radial and axial clearance are required for easy installation on in-line closed loop pipe.

Unlike other competitive cold cutters our lathes have more bearings making it the most versatile machine in the industry to cut and bevel pipe, re-machine flanges, machine shafts and more.



Benefits

- Sever or simultaneous Sever / Bevel 36" to 48" Nominal Pipe schedule pipe.
- Cold cutting in hazardous environments
- Exceptionally rigid, split-frame for precise on-site machining
- Lightweight, low clearance design for easy handling in tight working spaces
- O.D. Following Tool Block allows a +/- 1 inch out of round workpiece
- Tool holder accepts standard 3/4" or 1" (19.5 -25.4mm) tool bits
- Air Caddy (air filter and oiler) included with air drive systems
- Customer setups and drives available for your application





Mactech (Europe) Ltd
Mactech House
Riverdane Road
Eaton Bank Trading Estate
Congleton
Cheshire
CW12 1PN
+ 44 (0) 1260 281431

Mactech (Europe) Ltd.
Mactech House
Howe Moss Drive
Dyce
Aberdeen
Scotland
AB21 0GL
+ 44 (0) 1224 722666

Mactech (Europe) BV
Moerbeij 16
3371 NZ
Hardinxveld-Giessendam
Netherlands
+31 (0) 184 633 953

848 WD Clamshell Lathe

36 to 48 inches (914.4 to 1219mm) Nominal Bore

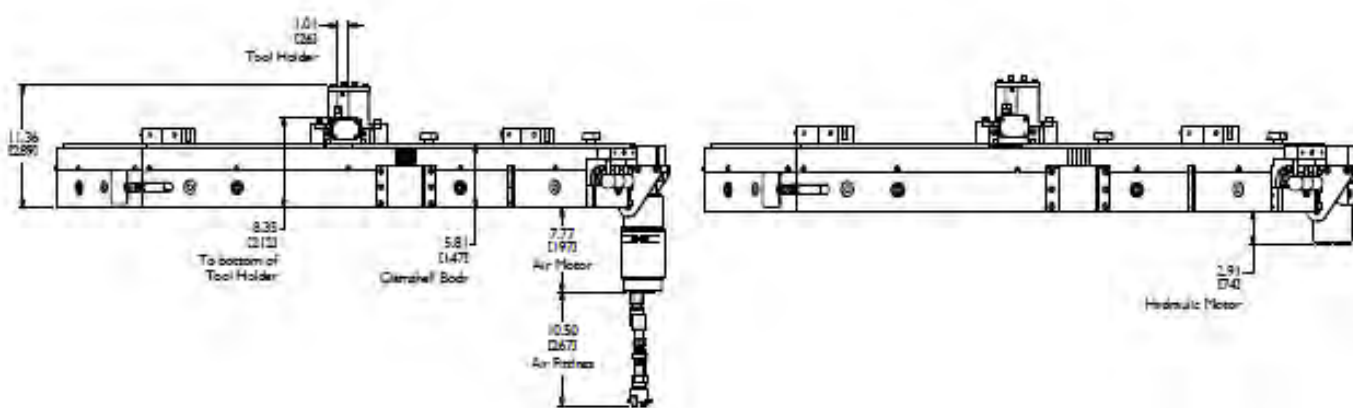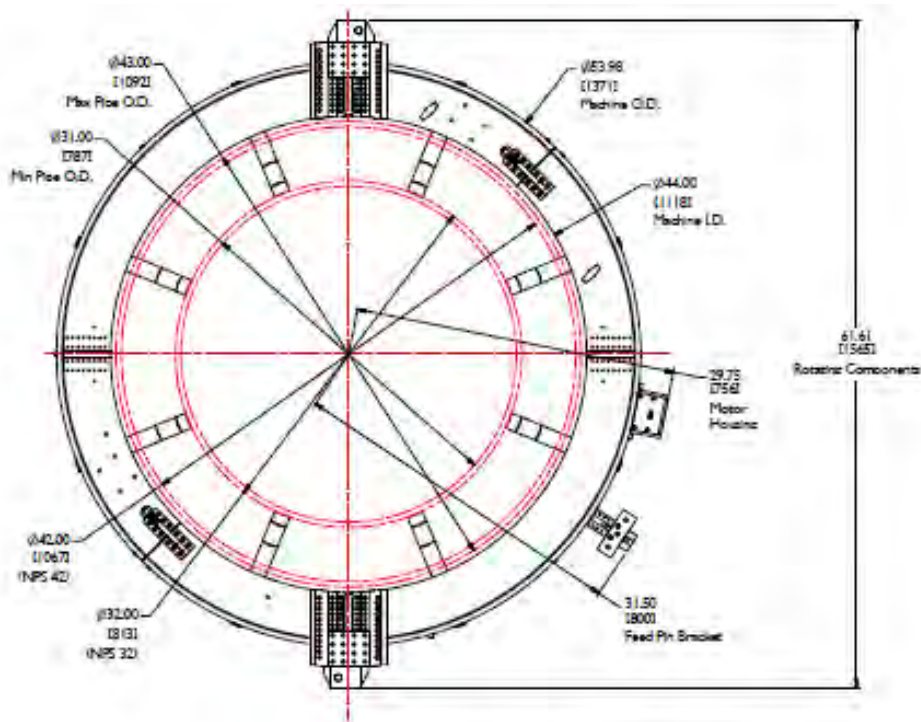

WD CLAMSHELL PORTABLE LATHE DIMENSIONS

| Dimensions | 843 WD | 848 WD | 860 WD |
|--------------------------|-----------------|-----------------|------------------|
| A - Machine I.D | 44.00" (1118mm) | 49.00" (1245mm) | 61.00" (1549mm) |
| B - Machine O.D | 53.98" (1371mm) | 58.98" (1498mm) | 70.98" (1803mm) |
| C - Roatating Components | 31.00" (1565mm) | 66.61" (1692mm) | 78.61" (1997mm) |
| D -Minimum Pipe O.D. | 31.00" (787mm) | 36.00" (914mm) | 48.00" (1219mm) |
| E - Maximum Pipe O.D. | 43.00" (1092mm) | 48.00" (1219mm) | 60.00" (1524mm) |

848 WD Clamshell Lathe

36 to 48 inches (914.4 to 1219mm) Nominal Bore

WD CLAMSHELL PORTABLE LATHE SPECIFICATIONS

| | | |
|-----------------------|--|---|
| Application Range | 36 to 48 inches (914.4 to 1219mm) Nominal Bore | |
| Feed | Feed Mechanism | 4 point starwheel with 3-pin tripper feed. |
| | Feed Rate | .002, .004 or .006 inches per revolution (0.05, 0.11 or 0.16 mm). |
| Drives | <ul style="list-style-type: none">Air Drive Requirement 100cfm @ 100 psi (2.8m³/min @ 6.9 bar)Hydraulic Drive HPU Requirement 10-15 gpm @1000 psi (38-57lpm@69 bar) continuous pressure - includes hose whips and quick connects | |
| | Operating Weights include tool blocks, slides and drive motor 848WD Air Drive: 748 lbs. (339 kg) 848WD Hydraulic Drive: 761 lbs. (345 kg) | |
| Weights | Shipping Weights includes equipment and shipping crate 848WD Air Drive: 1200 lbs. (544 kg) 848WD Hydraulic Drive: 1212 lbs. (550 kg) | |
| Options | Full line of tool bits Right angle & reversible drives Single point machining attachment Axial Feed Machining attachment Counterbore / Facing attachment Hydraulic Power Unit | |
| Frame | The aluminium frame is a split ring assembly capable of being disassembled to be installed around in-line piping. The frame has bearing mountings for the rotating head, a drive motor mount, locator pads for mounting to the pipe, and a gear cover. | |
| Cutting Head Assembly | The cutting head assembly is a heat treated 4140 alloy steel split ring gear assembly, which aligns with the split lines of the frame enabling the machine to be split in half. The cutting head has an integral spur gear on the outside diameter, and mounting devices for tool holders. | |
| Drive Assembly | The drive motor assembly mounts to the frame and is arranged with a pinion gear on a shaft. The drive motor mount bracket is designed to accept the reaction torque generated by the drive motor. | |
| Bearings | The cutting head runs on precision bearings that provide for both axial and radial force reactions experienced in pipe machining. Mactech utilises two separate radial bearing arrangements in every machine, providing maximum rigidity of operation. They are designed so that adjustments are not required. | |
| Tool Holder (blocks) | The tool holders mounted to the cutting head assembly are provided with automatic radial feed "star wheel" mechanisms. They are designed to maintain the radial clearance equal to the frame diameter and feature adjustable gibs for tool support. | |
| Locator Pads | Adjustable locator pads are actuated by jackscrews from the outside of the frame. A set of locator pads with extensions to cover the machine's operating range is provided with each machine. Additional sizes for each machine are available. | |
| Tool Bits | Mactech tool bits are available for severing, severing and double bevelling, severing and bevelling on the side of the cut on which the clamshell is mounted (right hand), severing and bevelling on the opposite side of the cut (left hand), counterboring, socket weld removal, etc. | |