

## Inline Diamond Wire Saw 48i ROV SS

20 to 48 inches (508 to 1219 mm)

Cuts pipe, multi-string casing and pilings, even cuts bundled wire


The workhorse of the diamond wire saw fleet, Mactech Europes Inline Saws have all the features you need to efficiently cut multi-string applications or heavy wall legs and cross members.

The Mactech 48i Inline Saw is designed for subsea cutting of a variety of materials and projects.

Typical uses include offshore decommissioning, and subsea or topside maintenance.

Stainless Steel Fittings & Fastners

ROV & Buoyancy Package Available

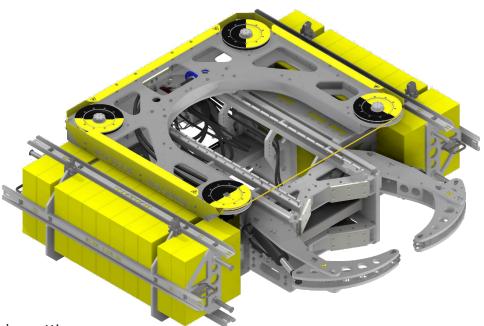

## Benefits

- Used for subsea and topside cutting
- Operates in any position
- Hydraulic feed and clamp system
- · Cuts multi-string casing, square piles, steel and concrete
- Easily modified for specialized cuts
- Cuts in any orientation, upside-down, right-side up, or at any angle
- Rigid frames make repeatability and back cutting easier and more accurate
- Powerful drives cut through the toughest steel aggregates, with less hang-ups
- Compact and lightweight designs which take less deck space and reduces excavation for BML cut
- ROV Compatible





## Inline Diamond Wire Saw 48i ROV SS

20 to 48 inches (508 to 1219 mm)



Specifications		Hydraulic Requirements	
Ø 20 - Ø 48 inches	Drive	15 gpm @ 3000 psi	
Ø 508 - Ø 1219 mm		57 lpm @ 207 bar	
139 x 124 x 38 inches	Feed	.5 gpm @ 650 psi	
3525 x 3150 x 968 mm		2 lpm @ 49 bar	
(Dry) 4500 lbs / (Wet) 20 lbs	Clamp	.5 gpm @ 1500 psi	
(Dry) 2041 kg / (Wet) 9 kg		2 lpm @ 103 bar	
	Ø 20 - Ø 48 inches Ø 508 - Ø 1219 mm 139 x 124 x 38 inches 3525 x 3150 x 968 mm (Dry) 4500 lbs / (Wet) 20 lbs	Ø 20 - Ø 48 inches       Drive         Ø 508 - Ø 1219 mm       139 x 124 x 38 inches         3525 x 3150 x 968 mm       Feed         (Dry) 4500 lbs / (Wet) 20 lbs       Clamp	



## Accessories Available

Water Hose System
Diamond Wire (Steel)
Diamond Wire (Concrete)
Diamond Wire (Premium Concrete)
Hydraulic Control Cart
Support Package (Box, SP, TH)
Spares Kit
Tool Kit

